


New


VALVE with EXTENDED BONNET

With or without integrated access port

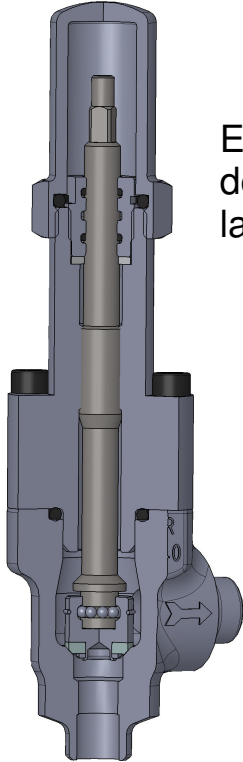

Extended bonnet specially designed for low temperature with larger insulation thickness

Valve with integrated access port given the possibility to filling up the circuit or to fit a measuring instrument

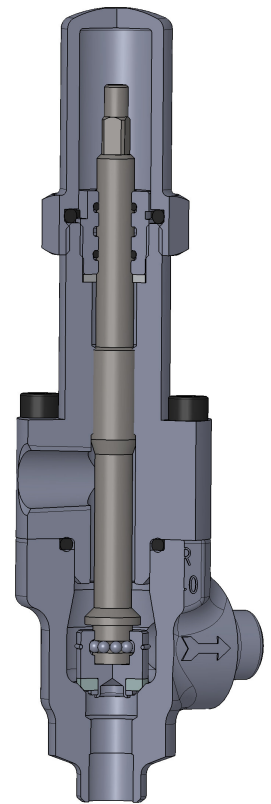

Available for ND 10 / 15 / 20 and 25
PN 40 and PN 65

Similar connection from standard valve

- for welding class S (ASTM standard)
- for welding class M (DIN 2448)
- for brazing class B
- for welding (2mm) class H